

Development and Testing of Advance Hybrid Savonius with ARM Gear based Structure for Electric Power Generation

Asst. Prof. Kishor N. Wagh¹

Mechanical Engineering Department, GNIT, Nagpur
Guru Nanak Institute of Technology, Nagpur
Nagpur, India

Vijay K. Kamble²

Mechanical Engineering Department, GNIT, Nagpur
Guru Nanak Institute of Technology, Nagpur
Nagpur, India

Abstract— As per the technical evolution and latest trends taken into consideration, here effectively created a new advancement in effective power generation system i.e. Advanced Hybrid Multi-power Station Turbine Structure for Efficient Power Generation. Previously till date we were aware of multiple power station and related turbines but as per future requirement of power in accordance with increasing population taken into consideration move towards a new innovation in the power generation i.e. Multi-Station power generation over single advanced Savonius turbine with hybrid structure that means this turbine having efficiency of using Artificial as well as Natural Resources for rotation i.e. air, water, stones, clay, artificial dams etc.

This project uses a savonius structure which is very advanced and having efficiency greater than other turbines also this structure able to rotate multiple generators so that we can able to handle multiple power stations using that single unit. Savonius wind turbines are a type of vertical-axis wind turbine (VAWT), used for converting the force of the wind into torque on a rotating shaft. The turbine consists of a number of aerofoils, usually but not always vertically mounted on a rotating shaft or framework, either ground stationed or tethered in airborne systems. Now a day's power requirement is the biggest demand in the growing world. Since last decade we are using multiple turbines structure so accordingly we have succeed to move only one generator and one station but this structure succeed to rotate multiple generators and according having capability to move multiple stations. This Advanced Hybrid Savonius Multi-Station Structure unit uses four units i.e. Advanced Savonius unit, Main Bigger Arm, Sub eight Arms, Multiple Generators Units so ultimately created Multi-station Structure. This Multi-Station Structure is the demand of developing technology.

Keyword: - Savonius turbine .

I. INTRODUCTION

This is not a simple structure like simple turbine. This is advanced technical structure created specially taken vision over multiple natural resources and artificial resources. This structure having natural resources settlement and re-utilization capacity, that means this structure not only uses multiple resources i.e. wind power, water force and other but also settle them to reutilization so that this turbine rotate with more torque and able to create more output so that we can able to charge battery within minimum time.

The Savonius turbine is one of the simplest turbines. Aerodynamically, it is a drag-type device, consisting of two or three scoops. Looking down on the rotor from above, a

two-scoop machine would look like an "S" shape in cross section. Because of the curvature, the scoops experience less drag when moving against the wind than when moving with the wind. The differential drag causes the Savonius turbine to spin. Because they are drag-type devices, Savonius turbines extract much less of the wind's power than other similarly-sized lift-type turbines. Much of the swept area of a Savonius rotor may be near the ground, if it has a small mount without an extended post, making the overall energy extraction less effective due to the lower wind speeds found at lower heights.

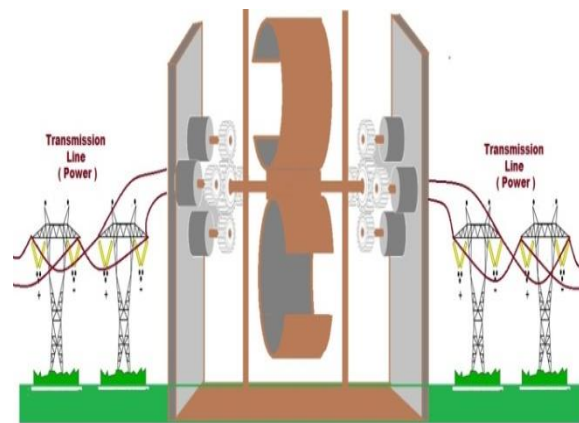


Fig.1 Main Savonius Assembly

Most anemometers are Savonius turbines for this reason, as efficiency is irrelevant to the application of measuring wind speed. Much larger Savonius turbines have been used to generate electric power on deep-water buoys, which need small amounts of power and get very little maintenance. Design is simplified because, unlike with horizontal axis wind turbines (HAWTs), no pointing mechanism is required to allow for shifting wind direction and the turbine is self-starting. Savonius and other vertical-axis machines are good at pumping water and other high torque, low rpm applications and are not usually connected to electric power grids. They can sometimes have long helical scoops, to give smooth torque.

II. METHODOLOGY

As per the technical evolution and technical trends taken into consideration so we have created a "Advanced Hybrid

Savonius and arm gear based effective Mechanical Structure for Multi-Station Optimized Power Generation. This system uses an advanced savonius hybrid turbine which will rotate over multiple natural resources water force, wind power and related things having efficiency greater than aerodynamic turbine. The advancement of this turbine is that, this turbine not only rotate over multiple natural resources and artificial resources but also having capability of resources settlement into it according to multiple savonius blade structure. The advantages of this project as compared to other system is that, on one single Savonius structure unit we can able to rotate multiple power substation and other power station uses single turbine which will rotate only single generator. So power output is more efficient than that normal. This project we can able to implement at industries, factories, agricultural areas, home, airport, hill station and artificial creations.

This is not a simple structure like simple turbine. This is advanced technical structure created specially taken vision over multiple natural resources and artificial resources.

This structure having natural resources settlement and reutilization capacity, that means this structure not only uses multiple resources i.e. wind power, water force and other but also settle them to reutilization so that this turbine rotate with more torque and able to create more output so that we can able to charge battery within minimum time.

This Project Consists of four different Units:

- [1] Savonius Unit
- [2] Main Arm.
- [3] Sub Arm
- [4] Multi-station Generator Unit

Savonius Unit :



Fig.2 Savonius balde

Here we will discuss the blade material, size and shape. In this Project we decided to use Aluminum for Material but u can use steel, Puck Board, or even a simple 5gal pale cut into 2 or 45gal drum cut into 2, so many options you have for the blades. The size for blade is 12.5 width, 6.25 depth, .125" thick, 20" circumference and 18" high. Savonius wind

turbines are a type of vertical-axis wind turbine (VAWT), used for converting the force of the wind into torque on a rotating shaft. The turbine consists of a number of aerofoils, usually but not always vertically mounted on a rotating shaft or framework, either ground stationed or tethered in airborne systems.

The Savonius turbine is one of the simplest turbines. Aerodynamically, it is a drag-type device, consisting of two or three scoops. Looking down on the rotor from above, a two-scoop machine would look like an "S" shape in cross section. Because of the curvature, the scoops experience less drag when moving against the wind than when moving with the wind. The differential drag causes the Savonius turbine to spin. Because they are drag-type devices, Savonius turbines extract much less of the wind's power than other similarly-sized lift-type turbines. Much of the swept area of a Savonius rotor may be near the ground, if it has a small mount without an extended post, making the overall energy extraction less effective due to the lower wind speeds found at lower heights.

III. STEPWISE CREATION OF ASSEMBLY

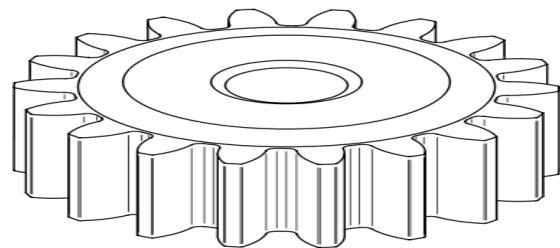


Fig.3 Main Arm

This project uses main arm having large diameter with some thickness. This main arm is link with the savonius unit, that means according to the rotation of savonius unit, the main arm rotates. the main arm is smallest in size that of savonius unit. The main arm having major gear/wheel whose RPM will be greater than that of savonius unit that means for single rotation of savonius unit the main arm rotates multiple times. This advantage which is useful to increase the RPM of main arm accordingly sub arm, via savonius unit.




Fig.4 Sub Arm

In this project, here used 4 sub arms, these 4 arm are nothing but the 4 gears which is link with main arm gear. Ultimately the rotation savonius unit, main arm rotates and accordingly sub 4 arm rotates. The gear assembly of 4 arm are created according to increase maximum RPM stepwise

from savonius unit to main arm and main arm to sub arm. The diameter thickness and teeth of gear i.e. sub arm is less than main arm and savonius unit so according we will get maximum RPM through the savonius unit and main arm and main arm o sub arm. This advance structure helps to generate maximum RPM at the sub arm. This sub arm present in a multistation structure form, so according we can able to connect multiple generator unit .

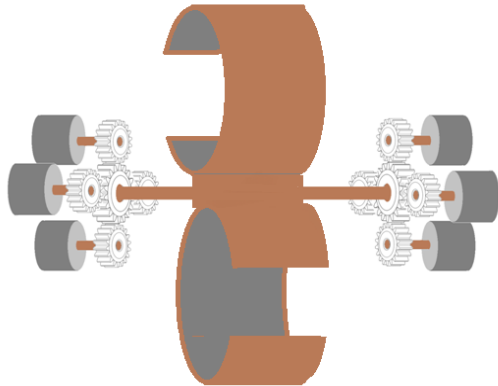


Fig.5 Gear Structure for Savonius Unit



Fig.6 Generator unit

This project used multistation structure that means over one savonius unit and single main arm, here used multiple sub arm and accordingly multiple generator. This assembly works from savonius unit to generator with increase in RPM form that means with minimum natural or artificial resources i.e. wind power, water force and etc. The savonius structure rotates with minimum amount of energy. This rotation helps to rotate main arm with greater RPM than that of savonius turbine. The main arm helps to rotate sub multiple arms the RPM of sub arm is greater than main arm and accordingly the generator i.e, 4 multiple generator rotates with greater RPM .

IV RESULT AND DISCUSSION

Project Model tested Output for Single Generator :

TABLE I

Savnius Rotor speed (N) rpm)	Driver gear speed (N ₁) rpm	Driven gear speed (N ₂) rpm	Voltage (V)	Current (mA)	Power (W)
20	180	720	8.12	0.200	1.6
30	270	1080	10.02	0.371	3.71
40	360	1440	11.22	0.565	6.33
50	450	1800	18.24	0.769	14.02
60	540	2160	20.10	0.980	19.69

Therefore Output for four DC Generator:

TABLE II

Savnius Rotor speed (N) rpm)	Driver gear speed (N ₁) rpm	Driven gear speed (N ₂) rpm	Voltage (V)	Current (mA)	Power (W)
20	180	720	32.48	0.200	6.49
30	270	1080	40.08	0.371	14.86
40	360	1440	44.88	0.565	25.35
50	450	1800	72.96	0.769	56.10
60	540	2160	80.4	0.980	78.79

Comparison between this project output with existing system by graph :-

1) Voltage vs Voltage

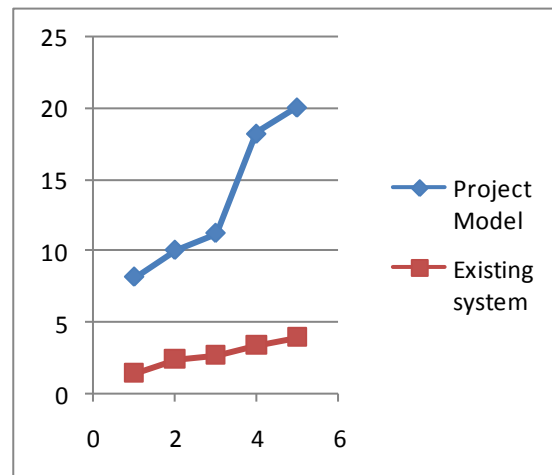


Fig.7 Voltage vs Voltage graph

As seen in scatter chart plotted above, it can be easy to conclude that the project model outputs for voltage is more better and much higher as compare existing system result. As the speed of turbine rotor increases then it is seen that the voltage production increases. That's why the project model voltage graph is goes to higher side.

2) Current vs Current

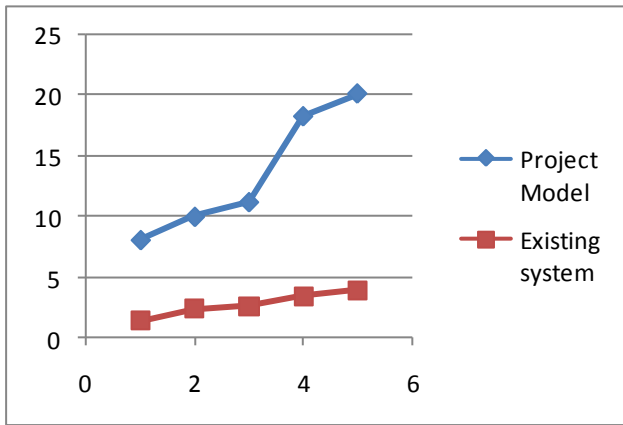


Fig.8 Current vs Current graph

As seen in chart plotted above, it can be easy to conclude that the project model outputs for current is more better and much higher as compare existing system result. As the speed of turbine rotor increases then it is seen that the voltage production increases. This result directly relate to current. So alternately current is increases. That’s why the project model graph is goes to higher side.

3) Power vs Power

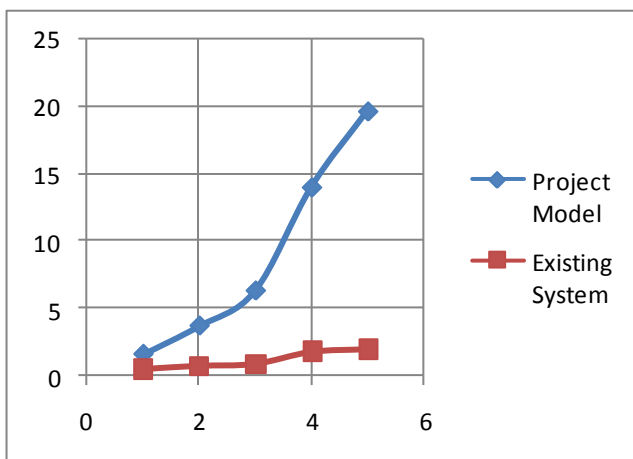


Fig.9 Voltage vs Voltage graph

As seen in chart plotted above, it can be easy to conclude that the project model outputs for power is better and much

higher as compare existing system result. As the speed of turbine rotor increases then it is seen that the voltage production increases. This result directly relate to current. So alternately current is also goes on increasing state. So by this V and I it is easy to calculate power for different rpm of turbine and hence that’s why the project model graph is goes to higher side.

VI CONCLUSION

The rotation of four generator units is based on main arm followed by savonius unit with geared coupling. This structure i.e. single savonius with multiple generating stations over single arm not only provides efficiency to the system but also increases utility with multiple power stations. As per the result shown in tables having power output almost six times than conventional system. And system having four generators, combinely able to become more effective wind power plant which will able to handle large load. We can use this system in industrial region where large power is required also we can use this system in agricultural area where there is no availability of power so that we can able to cover larger geographical area for power distribution.

In the advancement of this project if we will increase the generator capacity and large savonius unit with increase number of generators units so we can be able to create biggest power plan with optimized cost and suitable power.

VI REFERENCES

- [1] Mustafa Tutar, Performance analysis of a horizontal axis 3- bladed Savonius type wave turbine in an experimental wave flumes (EWF),Elsevier journal , 20 july 2014, Renewable Energy 86, pp. 8-25 .
- [2] Norzanah Rosmin et , Experimental study for the single-stage and double-stage two-bladed Savonius micro-sized turbine for rain water harvesting (RWH) system, 2nd International Conference on Sustainable Energy Engineering and Application, ICSEEA 2014
- [3] N.H. Mahmoud , An experimental study on improvement of Savonius rotor performance, Alexandria Engineering Journal (2012) 51, 19-25 ..
- [4] Jend Sudirman ,An experimental study on the performance of Savonius wind turbines related with the number of blades,sciencedirect, Energy Procedia 68 (2015) 297 – 304.
- [5] R.D. Maldonado , Design , simulation and construction of a Savonius wind rotor for subsidized houses in Mexico,sciencedirect, Energy Procedia 57 (2014) 691 – 697.
- [6] Frederilus , An experimental study on the performance of savonius wind turbines related with number of blades, Elsevier journal, Energy 68 (2015) 297-304.
- [7] Jeff Whalley , Effect of turbulence on Savonius rotor efficiency, Elsevier journal , 20 aug 2012, Renewable Energy,65,pp.7-21.