

Minituarized Compact Monopole Antenna for Multiband Applications

Patel Jalpa M

M.TECH (Digital communication)

Student of RIET, Jaipur

RTU, KOTA, RAJASTHAN

Chandresh D. Parekh

Asst. Prof. (Electronics and communication Engg.)

Raksha Shakti University,

Ahmedabad, Gujarat, India

Abstract

Modern telecommunication system require antenna with wider bandwidth and smaller dimensions. Various antennas for wide band operation have been studied for communication and radar system. The fractal antenna is preferred due to small size, light weight and easy installation. A fractal microstrip antenna is used for multiband application in this project provides a simple and efficient method for obtaining the compactness. A sierpinski carpet based fractal antenna is designed for multiband applications. It should be in compactness and less weight is the major point for designing an antenna. This antenna is providing better efficiency.

Keywords-component; sierpinski gasket,fractal,multiband antenna

1. INTRODUCTION (HEADING 1)

The term fractal was coined by the French mathematician B.B.Mandelbrot during 1970's after his pioneering research on several naturally occurring irregular of conventional geometrics not contained within the realms of conventional Euclidian geometry has significantly impacted many areas of science and engineering .one of which is antennas. Antenna using some of these geometries for various telecommunication application are already available commercially .The use of fractal geometrics has been shown to improve several antenna features to varying extents. Microstrip patch antenna (MPA) has attracted wide interest due to its important features .Such as light weight, low cost, simple to manufacture and easy to integrate with RF devices. For reducing the size of antenna, fractal geometrics have been introduced. The main objectives are to design a square shaped fractal antenna which will be small in size and multiband performance. A fractal is “ a rough of fragmented geometric shape that can be split into parts, each of which is reduced size copy of the whole .Roots of the mathematical interest in fractals can be traced back to the late 19th century. However mathematical fractal is based on an equation that undergoes iteration, a form of feed based on recursion.

Fractals are a class of shapes which have not characteristics size. Each fractal is composed of multiple iterations of single elementary shapes. The iterations can boundary but of infinite length or area.

Fractals have the following features.

1. It has a fine structure at arbitrarily small scales.
2. It is too irregular to be easily described in traditional Euclidean geometric.
3. It is self-similar.
4. Simple and recursive.

A fractal is “A rough of fragmented geometric shape” that is generated by starting with a very simple pattern that grows through the application of rules. In many cases the rules to make the figure grow from one stage to next involve taking the original figure and modifying it or adding to it. The process can be repeated recursively an infinite number of times.

The first application of fractals to the field of antenna theory was reported by Kim and jagged. They introduced a methodology for designing low side lobe arrays that is based on the theory of random fractals. The fact that self-scaling array can produce fractal radiation pattern was first established in 1992.This is accomplished by studying the properties of a special type of non uniform linear array, called aweiertrass array, which has self-scaling element spacing and current distribution.

For reducing the size of antenna, fractals geometrics have been introduced in the design of antenna fractal geometrics have two antennas. Fractal geometrics have two common properties: self-similar property, space filling property. The self-similarity property of certain fractals results in multiband behavior. Using the self-similarity properties a fractal antenna can be designed to receive and transmit over a wide range of frequencies. While using space filling properties, fractal makes reduce antenna size.

Fractal antenna engineering is the field, which utilize fractal geometrics for antenna design. It has become one of the growing fields of antenna engineering due to its advantage over conventional antenna design.

2. ANTENNA DESIGN

2.1 Equation

The transmission line model represents the microstrip antenna by two slots each of width 'W' and height 'h' separated by two impedance Z_c transmission line of length L. the essential parameters for the design an antenna according the transmission line method are dielectric constant of the substrate (ϵ_r), resonant frequency (fr) and the height of substrate h. The conventional microstrip rectangular antenna is designed by following the standard procedures:

- (1) Calculation of the width W of antenna, which is given by:

$$W = \frac{\lambda_0}{2} \left(\frac{\epsilon_r + 1}{2} \right)^{-1/2}$$

- (2) Calculation of effective dielectric constant, ϵ_{eff} , which is given by:

$$\epsilon_{eff} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left[\frac{1}{\sqrt{1 + 12 \left(\frac{h}{W} \right)}} \right]$$

- (3) Calculation of the effective length, L_{eff} which is given by:

$$L_{eff} = \frac{c}{2f_r \sqrt{\epsilon_{eff}}}$$

- (4) Calculation of the length extension, ΔL , which is given by:

$$\Delta L = 0.412h \frac{(\epsilon_{eff} + 0.3) \left(\frac{W}{h} + 0.264 \right)}{(\epsilon_{eff} + 0.258) \left(\frac{W}{h} + 0.8 \right)}$$

- (5) Calculation of the effective length extension of patch L which is given by:

$$L = L_{eff} - 2\Delta L$$

- (6) Ground plane dimension L_s and W_s which are given by:

$$\begin{aligned} L_s &= 6h + L \\ W_s &= 6h + L \end{aligned}$$

2.2 Design

The parameter taken into account for the design are the resonant frequency ($f_r=2.77\text{GHz}$), dielectric constant ($\epsilon_r=4.3$) and thickness of the substrate ($h=1.575\text{mm}$).the conventional patch antenna is shown in figure-1with dimensions.

The rectangular microstrip patch antenna is based on sieperinski carpet. For designing this fractal antenna IE3D software is used. The FR-4 epoxy material is used as substrate. The thickness of the substrate is 1.575mm. The dielectric constant ϵ_r of the antenna is 4.3. The sierpinski carpet fractal shapes is used in this paper with single iteration. In decomposition algorithm for rectangular shapes

is cut down from the center of the rectangular patch antenna which is shown the first iteration, again rectangular shape is cut down from the some portion of 1st iteration. Finally resonant frequency found at 2nd iteration.fig.1 shows the rectangular patch antenna without iteration and fig.2 shows the fractal with 1st iteration of the rectangular patch antenna. Fig.3 shows the rectangular patch antenna with 2nd iteration. The size of the rectangular patch antenna is 24mm × 33mm (without iteration) and after 1st iteration 'indetation' 8mm×11mm. This rectangular patch fractal antenna has scale factor equal to 1/3.




Figure 1 Conventional Patch Antenna

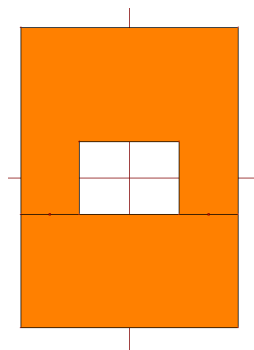


Figure 2 Geometry Of First Iteration

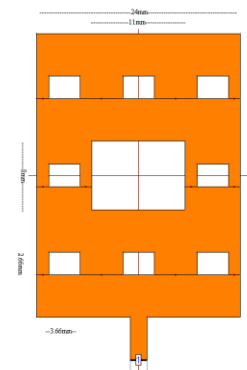


Figure 3 Proposed Antenna And Its Geometry Of Second Iteration

3. SIMULATION REASULT

Simulation of the proposed antenna is carried out by zeland inc's software based on method of moment (MOM) the simulated return loss of second iteration is shown in fig.4.

- f=4.352(GHz), E-total, phi=0 (deg)
- f=5.6(GHz), E-total, phi=0 (deg)
- ◇— f=6.24(GHz), E-total, phi=0 (deg)
- △— f=8.256(GHz), E-total, phi=0 (deg)
- ▲— f=11.392(GHz), E-total, phi=0 (deg)
- ◇— f=12.768(GHz), E-total, phi=0 (deg)
- ◇— f=13.504(GHz), E-total, phi=0 (deg)
- ◇— f=14.592(GHz), E-total, phi=0 (deg)

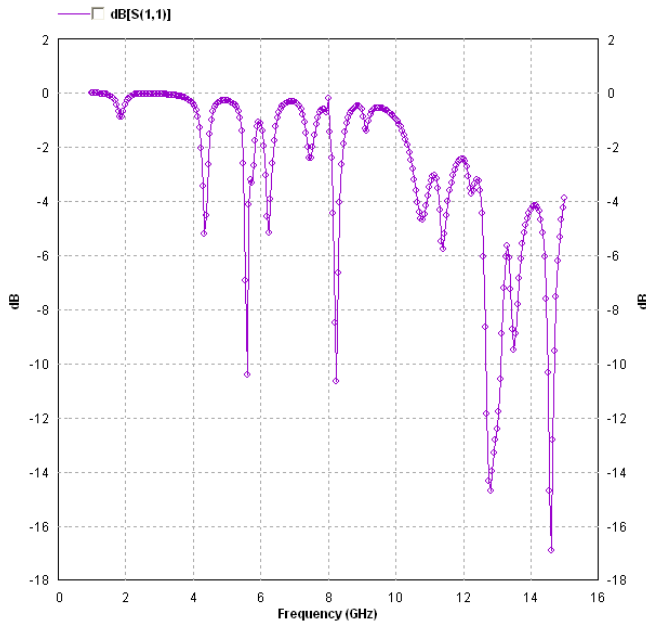


Figure 4 Simulated Return Loss (S11) Of Rectangular Fractal Antenna

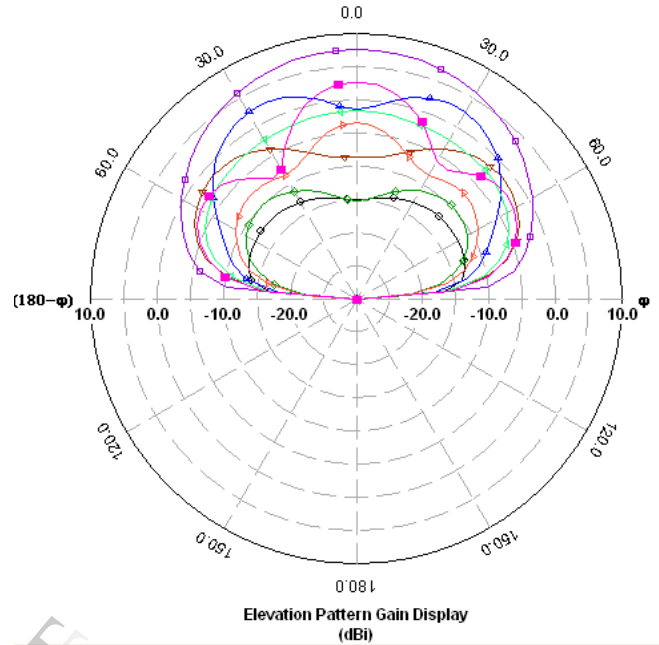


Figure 6 Elevation Pattern Gains Display (dbi)

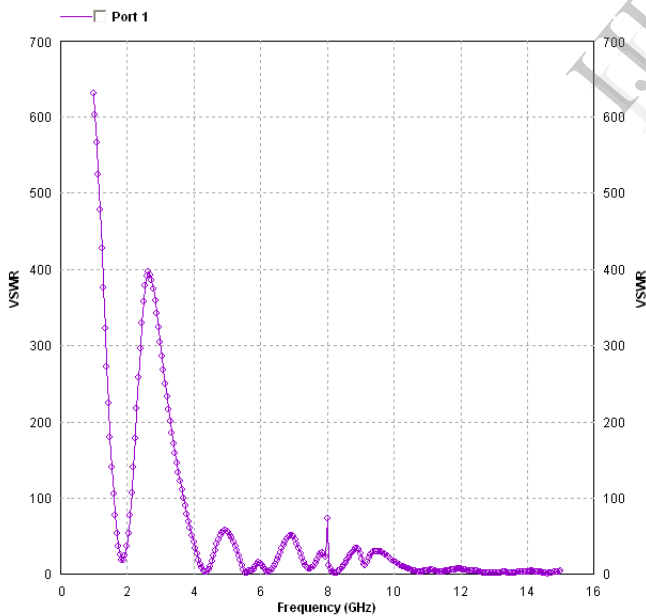


Figure 5 VSWR –Frequency Characteristic

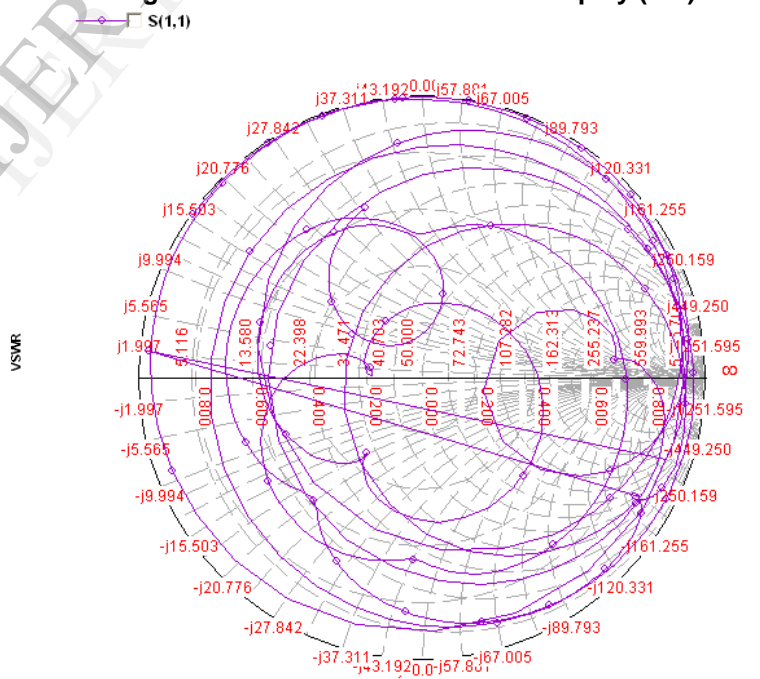


Figure 7 Smith Chart

TABLE 1: SIMULATION OF PROPOSED ANTENNA

S r N o	Fre q. (G Hz)	Radi ation Effic iency	Anten na Efficie ncy	Gain (dBi)	Directivit y		3dB Beam Width (degree)
					(dBi)	(de gre e)	
1	4.3 52	59.2 883	41.662 2	4.60 2 87	8.40 54 5	65, 90	53.2825, 58.1961
2	5.6	73.5 767	65.364 2	7.42 4 54	9.27 11 4	0, 70	60.0033, 77.0687
3	6.2 4	35.3 252	35.325 2	2.76 9 52	8.22 16 5	65, 40	35.7242, 45.2231
4	8.2 56	33.4 461	28.022 6	2.28 1 45	7.80 63 6	60, 27 0	44.205, 52.0199
5	11. 39 2	69.7 501	49.919	6.68 9 25	9.70 66	35, 30	33.0123, 46.4951
6	12. 76 8	22.1 935	22.094 6	1.37 6 17	7.93 33 2	55, 14 0	40.8714, 51.3686
7	13. 50 4	18.5 031	16.434 4	2.45 8 76	10.3 01 2	65, 90	28.1782, 35.9851
8	14. 59 2	28.6 201	23.797 1	3.50 3 3	9.73 80 6	65, 90	38.9439, 58.4226

4. CONCLUSION

The aspects of microstrip antenna have been studied in this paper. The aspect is the design of typical rectangular microstrip antenna. A simple and efficient technique of design has been introduced for an impedance matching improvement of antenna in this paper. The microstrip fractal antenna is proposed for the wireless various applications. The antenna is designed for multiband frequencies (4.35, 5.6, 6.24, 8.256, 11.39, 12.76, 13.50, and 14.59) GHz and the simulation result are obtained up to second iteration. The proposed antenna show a significant size reduction compared to the conventional microstrip antenna. The designed antenna is compact enough to be placed in typical wireless devices.

5. REFERENCES

- [1] N.M.Sameena and S.N.Mulgi, "A novel design of complementary symmetry Back-fed microstrip antenna for wide bandwidth, high gain and linear polarization" International journal of electronics engineering, jan-jun- 2011, vol: 3, number-1, pp-33-34.
- [2] Pramendra Tilanthe and P. C. Sharma, "Design of a single layer multiband microstrip square ring antenna" IEEE explore-www.ieee.org, Applied Electromagnetic Conference (AEMC), year: 2009, PP: 1– 4.
- [3] W.C. Liu and H.J.Liu, "Compact CPW-fed monopole antenna for 5GHz wireless application", Electronics Letter, Year: 2006, Vol: 42, Issue: 15, PP: 837– 839.
- [4] Duixian Liu and Brian Gaucher, "A New multiband Antenna for WLAN/Cellular Applications", Vehicular Technology Conference, 2004; VTC2004-Fall; IEEE 60th, Year: 2004, Vol: 1, PP: 243 – 246.
- [5] Marco A. Antoniadis and George V. Eleftheriades, "A Compact Multiband Monopole Antenna with a Defected Ground Plane", Antennas and Wireless Propagation Letters, IEEE, Year: 2008, Vol: 7, PP: 652 – 655.
- [6] Abdolmehdi Dadgarpour, Amin Abbosh and Farid Jolani, "Planar Multiband Antenna for Compact Mobile Transceivers", Antennas and Wireless Propagation Letters, IEEE, Year: 2011, Vol:10, PP: 651 – 654.
- [7] Qi Luo, J.R.Pereira and H.M.Salgado, "Tunable Multiband Antenna with an Active Artificial Magnetic Conductor Ground Plane", Microwave Conference (EuMC), 2010 European, Year: 2010, PP:461 – 464
- [8] Eko Tjipto Rahardjo, Fitri Yuli Zulkifli and Desi Marlana, "Multiband Microstrip Antenna Array for WiMAX Application", Microwave Conference, 2008; APMC2008;Asia-Pacific, Year: 2008, PP:1 – 4.
- [9] Muhammad Waqas, Zubair Ahmed and Mojeeb Bin Ihsan, "Multiband Sierpinski Fractal Antenna", Multi topic Conference, 2009; INMIC 2009; IEEE 13th International, Year: 2009, PP: 1– 6
- [10] Kin-Lu Wong, Gwo-Yun Lee, and Tzung-Wern Chiou, "A Low Profile Planar Monopole Antenna for Multiband Operation of Mobile Handsets", Antennas and Propagation; IEEE Transactions, Year: 2003, Vol: 51, No.: 1, PP: 121 – 125.
- [11] Dongho Kim, Seokjin Hong, Jaehoon Choi, "Design of a Multiband Antenna for GSM900/ DCS1900/ WiMax Wireless Communication Application", Microwave Conference, 2010; APMC2010;Asia-Pacific, Year:2010, PP:6 – 9.